

Professional Series Product Range



SMART SOLUTIONS FOR THESE AND OTHER MARKETS









HEALTH Care







GOVERNMENT

MANUFACTURING

Who We Are

Velcro Companies
VELCRO® Brand Professional Series

General Purpose

General	Use	Fastener	

High Performance

High Strength Fastener	10
Extra Thin Fastener	12

Self-Engaging Tape

VELCRO[®] Brand ONE-WRAP[®] Tape

.....14

Sec.

Additional Information

Sales Promotion Tools	
Product Range Overview	21



Velcro Companies

Velcro Companies is a technology-driven, global organization providing fastening solutions that solve problems in simple, elegant and surprising ways for professionals and consumers around the world. We have a heritage of innovation spanning more than 60 years and more than 400 active patents and numerous trademarks, including the VELCRO® trademark, which is registered throughout the world. We develop and deliver solutions for customers through an integrated production and service system that includes manufacturing locations in the United States, Canada, Mexico, Uruguay, Spain, Belgium, China and Vietnam and sales offices around the world.






VELCRO® Brand Solutions for Industrial Markets

VELCRO[®] Brand offers Professional Series Fasteners that provide a greener alternative for manufacturers, architects and builders—and can help earn potential green building rating points. These fastening solutions reduce the use of volatile organic compounds (VOCs), eliminate adhesive off-gassing and reduce jobsite waste, while reducing installation time. VELCRO[®] Brand Professional Series Fasteners require fewer tools; are easy to replace and reposition; prevent damage to the underlying building envelope; and can be applied in a wider range of temperature and weather conditions for improved productivity and reduced labor costs.



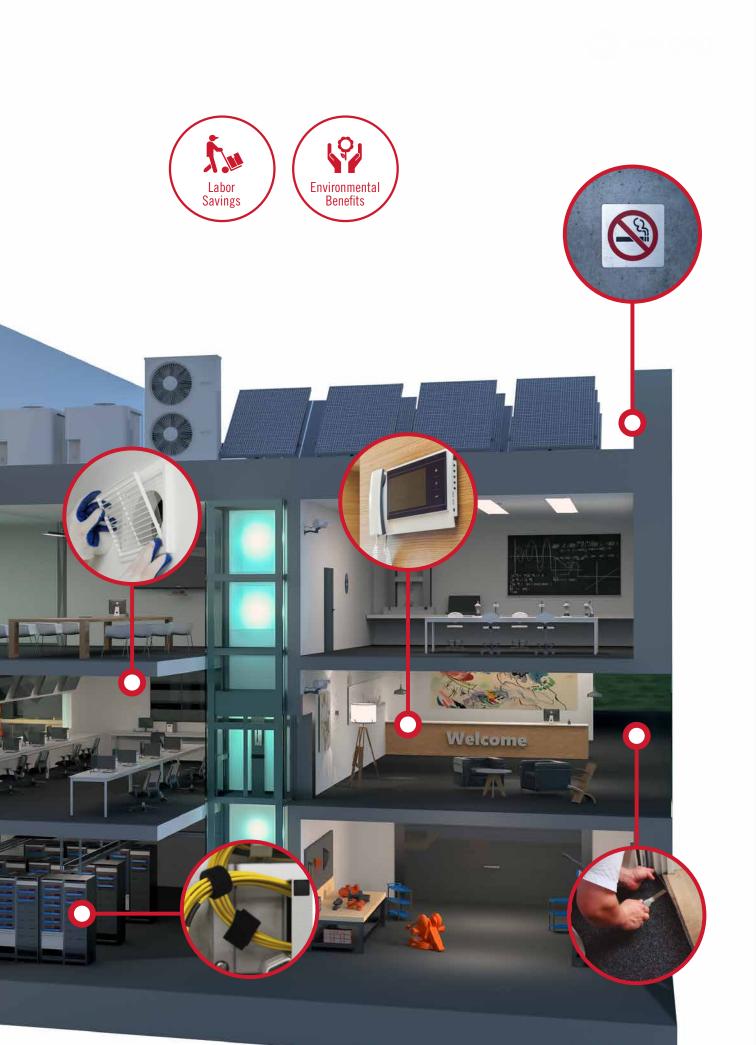

GENERAL PURPOSE

GENERAL USE FASTENER

Medium profile hook & loop closure for indoor use. Adhesive suitable for wide range of substrates (aluminum, stainless steel, glass, plywood and limited plastic surfaces). Medium tack adhesion. Commonly used for indoor mounting of items that are often used, replaced or upgraded. Not suitable for polyethylene, polypropylene or vinyl-PVC.



CLOSURE INFORMATION MATERIAL Polvamide CYCLE LIFE High AVERAGE PEEL 4.2 PIW AVERAGE SHEAR 12 PSI AVERAGE TENSILE 7.5 PSI STRENGTH ADHESIVE OPERATING -30° to 140°F TEMPERATURE ADHESIVE PEEL STRENGTH 8 PIW

ADHESIVE SUBSTRATE COMPATIBILITY

Anodized Aluminium > Glass > Painted Wallboard > Plywood > Polyester > Polyethylene > Polypropylene >	
Painted Wallboard Image: Comparison of the second	(
Plywood Polyester Polyethylene Polyethylene	/
Polyester Polyethylene	1
Polyester Polyethylene	/
	1
Polypropylene	(
	<
Stainless Steel	/
Vinyl	1
Formica (Polished side)	1
Cardboard	1
Polyacrylic	1
Fabrics ×	(

✓ Recommended ✓ Good × Not Recommended

REFERENCE	UPC CODE	LENGTH	WIDTH	COLOR	ADHESIVE	QTY PER SHIPPING BOX	APPLICATION METHOD
31297	075967312978	5 yards	1"		0172	6	Stick, staple, nail, screw
31298	075967312985	5 yards	1"		0172	6	Stick, staple, nail, screw
31299	075967312992	5 yards	2"		0172	6	Stick, staple, nail, screw
31300	075967313005	5 yards	2"		0172	6	Stick, staple, nail, screw
31301	075967313012	25 yards	1"		0172	6	Stick, staple, nail, screw
31302	075967313029	25 yards	1"		0172	6	Stick, staple, nail, screw
31303	075967313036	25 yards	2"		0172	6	Stick, staple, nail, screw
31304	075967313043	25 yards	2"		0172	6	Stick, staple, nail, screw

ADHESIVE RECOMMENDATIONS OF USE

Ideal temperature from -30°F to 140°F

Relative humidity from 40% to 60%

THE REAL PROPERTY IN THE REAL PROPERTY INTO THE REAL PR

Clean the surface



Remove liner and press

Please wait 24 hours



OPENINGS


HIGH

NG STRENGTH*

17 lbs



* Weight resistance of 2 inches x 4 inches of closure.

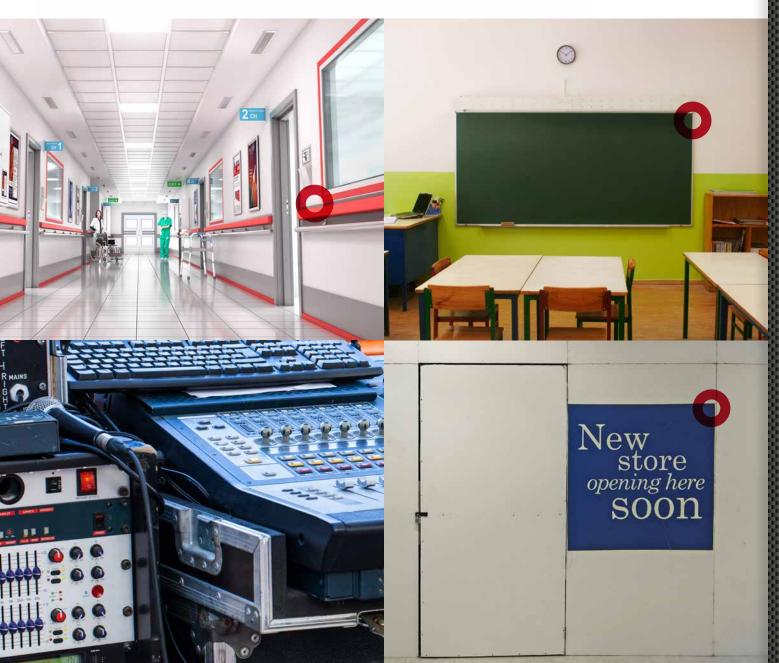

9

HIGH PERFORMANCE

HIGH STRENGTH FASTENER

VELCRO® Brand Extruded Plastic hook & loop closure. Medium profile hook & loop closure for indoors (2x) stronger than our General Use Fasteners. Adhesive suitable for wide range of substrates (aluminum, PVC-vinyl, stainless steel, glass, plywood and limited plastic surfaces). High temperature (140° F) rated adhesive. Commonly used for indoor mounting applications that are often used, replaced or upgraded. Not suitable for polyethylene or polypropylene.



CLOSURE INFORMATION						
	MATERIAL	Polyamide				
ò	CYCLE LIFE	Medium				
	PEEL	1.37 PIW				
+	SHEAR	24.5 PSI				
<u>t</u>	TENSION	4.8 PSI				
l	ADHESIVE OPERATING Temperature	-30° to 140°F				
	ADHESIVE PEEL STRENGTH	8 PIW				

ADHESIVE SUBSTRATE COMPATIBILITY

Anodized Aluminium	\times
Glass	\checkmark
Painted Wallboard	\checkmark
Plywood	\checkmark
Polyester	\checkmark
Polyethylene	\times
Polypropylene	\times
Stainless Steel	\checkmark
Vinyl	\checkmark
Formica (Polished side)	\checkmark
Cardboard	\checkmark
Polyacrylic	\checkmark
Fabrics	\times
🗸 Recommended 🗸 Good 🛛 🗙 Not Recommende	d

REFERENCE	UPC CODE	LENGTH	WIDTH	COLOR	ADHESIVE	QTY PER SHIPPING BOX	APPLICATION METHOD
31305	075967313050	5 yards	1"		0172	6	Stick, staple, nail, screw
31306	075967313067	25 Yards	1"		0172	6	Stick, staple, nail, screw
31307	075967313074	5 yards	2"		0172	6	Stick, staple, nail, screw
31308	075967313081	25 yards	2"		0172	6	Stick, staple, nail, screw

ADHESIVE RECOMMENDATIONS OF USE







Remove liner and press

Please wait 24 hours





* Weight resistance of 2 inches x 4 inches of closure.



HIGH PERFORMANCE

EXTRA THIN FASTENER

VELCRO[®] Brand Extruded Plastic hook & loop closure. Low profile hook & loop closure for indoor use which is 30% thinner than our General Use Fasteners. Adhesive suitable for a wide range of substrates (Aluminum, stainless steel, glass, plywood and plastic surfaces). Commonly used for signage, keypads, electronic wall mounted devices and all indoor devices that require flush mount applications. Not compatible with PVC-vinyl.



|--|

	MATERIAL	Polypropylene (Hook) Polyamide (Loop)
õ	CYCLE LIFE	Medium
	PEEL	1.05 PIW
	SHEAR	63.2 PSI
	TENSION	12.3 PSI
Į	ADHESIVE OPERATING TEMPERATURE	-30° to 110° F
-	ADHESIVE PEEL STRENGTH	8 PIW

ADHESIVE SUBSTRATE COMPATIBILITY

Anodized Aluminium	\checkmark
Glass	\sim
Painted Wallboard	\sim
Plywood	\checkmark
Polyester	\checkmark
Polyethylene	\checkmark
Polypropylene	\checkmark
Stainless Steel	\checkmark
Vinyl	\times
Formica (Polished side)	\sim
Cardboard	\checkmark
Polyacrylic	\checkmark
Fabrics	\checkmark

REFERENCE	UPC CODE	LENGTH	WIDTH	COLOR	ADHESIVE	QTY PER SHIPPING BOX	APPLICATION METHOD
31310	075967313104	5 yards	1"		0115	6	Stick, staple, nail, screw
31311	075967313111	5 yards	1"		0115	6	Stick, staple, nail, screw
31312	075967313128	5 yards	2"	•	0115	6	Stick, staple, nail, screw
31313	075967313135	5 yards	2"		0115	6	Stick, staple, nail, screw
31314	075967313142	25 yards	1"		0115	6	Stick, staple, nail, screw
31315	075967313159	25 yards	1"		0115	6	Stick, staple, nail, screw
31316	075967313166	25 yards	2"		0115	6	Stick, staple, nail, screw
31317	075967313173	25 yards	2"		0115	6	Stick, staple, nail, screw

ADHESIVE RECOMMENDATIONS OF USE

Ideal temperature from -30°F to 110°F Relative humidity from 40% to 60%







Clean the surface Remove liner and press Please wait 24 hours





* Weight resistance of 2 inches x 4 inches of closure.




SELF-ENGAGING TAPE

ONE-WRAP® Tape

VELCRO[®] Brand ONE-WRAP[®] tape has proven its value as an easy to apply, reusable, safe and adjustable bundling solution. Commonly used in cable management, security, electrical and control systems and IoT infrastructure.




CLOSURI	E INFORMATION	Non FR
	MATERIAL	Polyethylene (Hook) Polyamide (Backing)
ò	CYCLE LIFE	Medium
	PEEL	0.5 PIW
+	SHEAR	23 PSI




Common VELCRO® Brand ONE-WRAP® Product Offerings • 5 YARD LINEAL							
REFERENCE	UPC CODE	LENGTH	WIDTH	COLOR	QTY PER SHIPPING BOX	APPLICATION METHOD	
31013	075967310134	5 Yard	1/2" 3/4"	Black (330)	24	Bundle, wrap, secure	
30940	075967309404			White (010)			
31023	075967310233			Black (330)	24		
31291	075967312916			White (010)			
31292	075967312923			Fiber Optic Pink (895)	24		
31293	075967312930			Fiber Optic Yellow (702)			
31294	075967312947			Fiber Optic Blue (893)	04		
31295	075967312954			Fiber Optic Green (183)	24		
31296	075967312961			Fiber Optic Orange (760)	24		



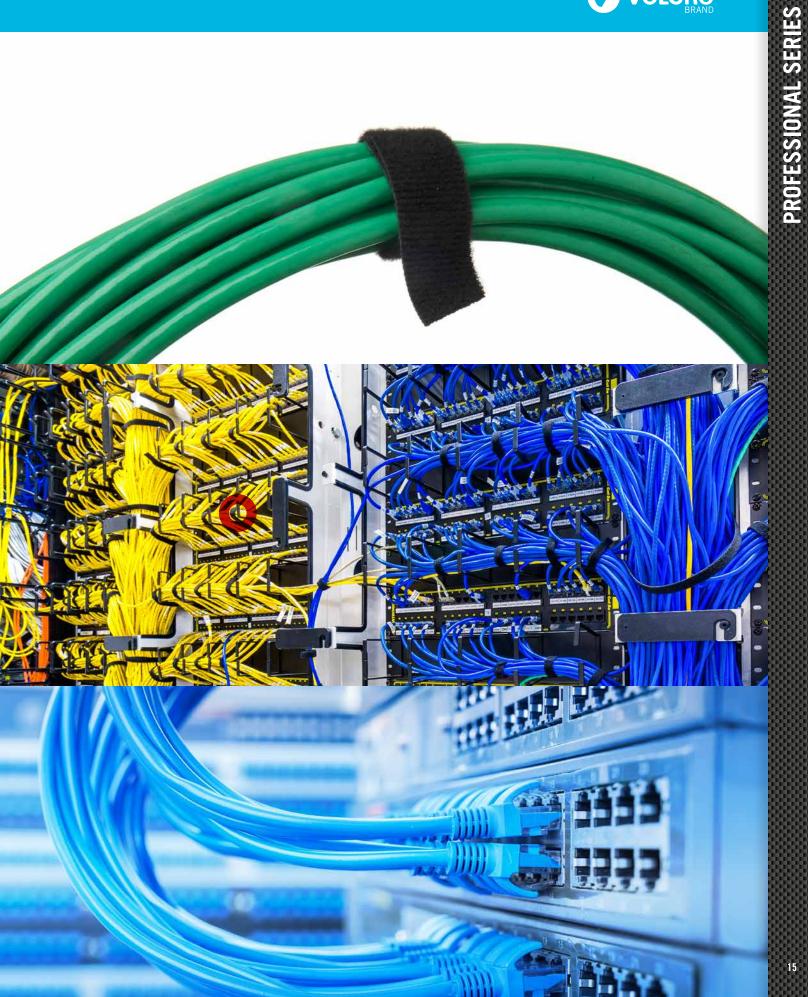

SELF-ENGAGING TAPE

Comn	Common VELCRO® Brand ONE-WRAP® Product Offerings • 25 YARD LINEAL						
REFERENCE	UPC CODE	LENGTH	WIDTH	COLOR	QTY PER SHIPPING BOX	APPLICATION METHOD	
31090 31033 31068 31069 31071 31070 31048 31072 30948 30947 30945 30953	075967310905 075967310332 075967310684 075967310691 075967310714 075967310707 075967310486 075967310721 075967309480 075967309473 075967309459 075967309534	25 yards	1/2"	 Black (330) White (010) Royal Blue (155) Red (520) Lemon (750) Coachman Green (650) Adamia (557) Fiber Optic Orange (760) Fiber Optic Blue (893) Fiber Optic Creen (183) Fiber Optic Yellow (702) 	24	Bundle, wrap, secure	
31086 31091 31060 31062 31064 31063 31049 31065 30978 30968 30944 30958	075967310868 075967310912 075967310608 075967310622 075967310646 075967310639 075967310653 075967310653 075967309787 075967309688 075967309442 075967309589	25 yards	3/4"	 Black (330) White (010) Royal Blue (155) Red (520) Lemon (750) Coachman Green (650) Adamia (557) Fiber Optic Orange (760) Fiber Optic Blue (893) Fiber Optic Rlue (895) Fiber Optic Green (183) Fiber Optic Yellow (702) 	24	Bundle, wrap, secure	
31085 31088 31056 31057 31046 31047 31028 31055 30977 30967 30943 30957	075967310851 075967310882 075967310561 075967310578 075967310462 075967310479 075967310288 075967310554 075967309770 075967309671 075967309435 075967309572	25 yards	1"	 Black (330) White (010) Royal Blue (155) Red (520) Lemon (750) Coachman Green (650) Adamia (557) Fiber Optic Orange (760) Fiber Optic Blue (893) Fiber Optic Reen (183) Fiber Optic Yellow (702) 	24	Bundle, wrap, secure	

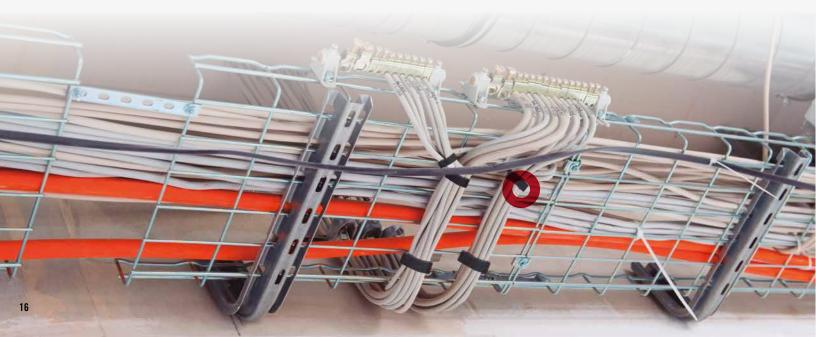

SELF-ENGAGING TAPE



17

TAPE

ONE-WRAP® FR Tape For Use In Plenum Air Space

VELCRO® Brand ONE-WRAP® Fire Retardant (FR) tape is the only hook & loop material that complies to national electric code standards for use in plenum air spaces*. This is used for bundling phone lines, ethernet cords and other IT infrastructure within plenum air space.



CLOSURE INFORMATION	FR	
MATERIAL	Polypropylene (Hook) Polyamide (Backing)	
CYCLE LIFE	CLE LIFE Medium	
PEEL	0.6 PIW	
SHEAR	29 PSI	
SIZE	TAPE SHAPE	
3/4" x 6"		
3/4" x 8"		

3/4" x 12"


*Plenum Rated–Suitable for use in air handling spaces in accordance with Section 300.22 (C) and (D) of the National Electrical Code.

Common VELCRO® Brand ONE-WRAP® FR Lineal Offerings							
REFERENCE	UPC CODE	LENGTH	WIDTH	COLOR	QTY PER SHIPPING BOX	APPLICATION METHOD	
30986	075967309862	25 yards	1/2"	Black (330)	24	Bundle, wrap, fasten	
30994	075967309947			Cranberry (502)			
31331	075967313319			White (010)			
30987	075967309879		3/4"	Black (330)			
30993	075967309930			Cranberry (502)			
31332	075967313326			White (010)			



POINT-OF-PURCHASE DISPLAY ELEMENTS

VELCRO[®] Brand is one of the most iconic brands in the world. Leveraging the VELCRO[®] Brand awareness through the use of point-of-purchase display elements can drastically improve sales in your retail environment. Contact a VELCRO[®] Brand customer relations specialist or your local sales representative for more information.

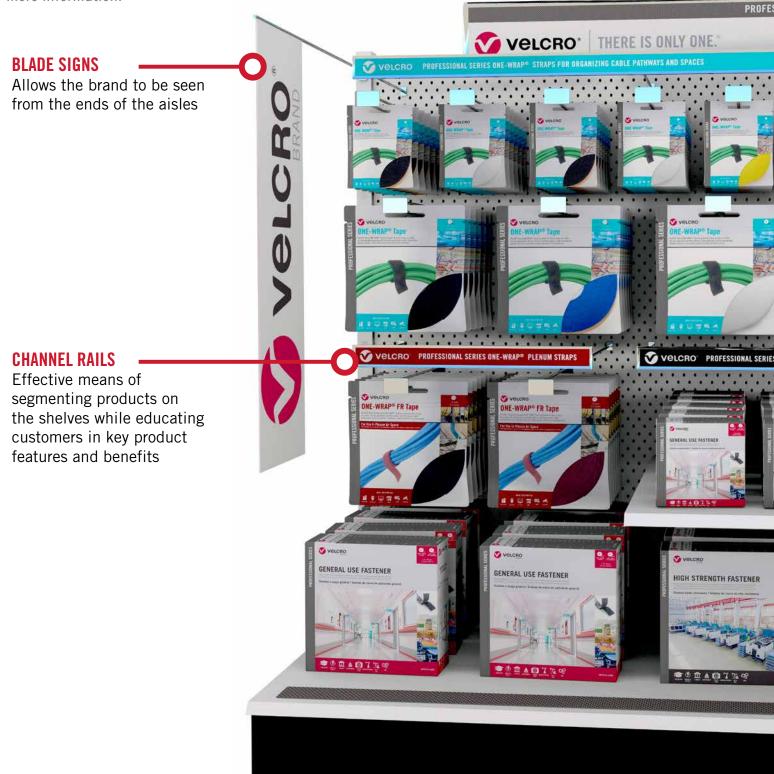



19



SSIONAL SERIES

SIONAL SERIES

PROF

HEADERS

Allows the brand to be seen across aisles

SAMPLE CARDS Product sample cards are available



DANGLE SIGNS

Draws attention to featured products without obstructing pricing

SHELF DECALS

Educates customers, maximizes unused space and draws attention to the VELCRO[®] Brand



Velcro Companies is a technology-driven, global organization providing fastening solutions that solve problems in simple, elegant and surprising ways for professionals and consumers around the world. We have a heritage of innovation spanning more than 60 years and own more than 400 active patents and numerous trademarks, including the VELCRO® trademark, which is registered throughout the world. We develop and deliver solutions for customers through an integrated production and service system that includes manufacturing locations in the United States, Canada, Mexico, Uruguay, Spain, Belgium, China and Vietnam and sales offices around the world.

To buy genuine VELCRO[®] Brand products and learn more about our company, visit www.velcro.com.



Global Consumer Office

VIL Ltd. Ground Floor, Booths Park 3, Chelford Road Knutsford, WA16 8GS United Kingdom Tel: (+44) 161 240 4516 Velcro.com

NAM

USA Velcro USA Inc. Tel: (+1) 800 225 0180

Velcro.com

Canada Velcro Canada Inc. Tel: (+1) 800 683 5276 canada@velcro.com Velcro com

marketing@velcro.com

LATAM

Mexico

Velcro de México, S.A. de C.V. Tlalnepantla de Baz, Edo. de México Tel: (+52) 55 5005 3300 infovdmex@velcro.com Velcrodemexico.com

León, Gto Tel: (+52) 477 980 0630 infovdmex@velcro.com Velcrodemexico.com

Brazil

Velcro Brasil Importação, Exportação e Comércio de Sistemas de Fixação Ltda. Campo Bom, RS

Tel: (+55) 51 3599 1483 infovbra@velcro.com Velcro.com.br

Sumaré SP Tel: (+55) 11 3197 2588 infovbra@velcro.com Velcro.com.br

Uruguay

Velcro Industrial del Uruguav S.A Tel: (+598) 2288 0008 infovurg@velcro.com Velcro.com

EMEA

Spain

Velcro Europe S.A.

. Tel: (+34) 93 758 32 98 infovesa@velcro.com

Velcro.es

Germany Velcro GmbH Freiberg am Neckar Tel: (+49) 7141 991 19-0 infovgmbh@velcro.com Velcro.de

Gronau Tel: (+49) 2562 96 45-0 infovgmbh@velcro.com Velcro.de

France

Velcro Industries France S.A.S. Tel: (+33) 1 34 38 78 88 infovif@velcro.com Velcro.fr

Australia

Belgium

Alfatex N.V.

Velcro.be

Italy

Velcro it

Velcro I td

Velcro.co.uk

Alfatex Sp. z o.o.

infopl@velcro.com

Poland

Velcro.pl

UK

Tel: (+32) 9 386 12 18

infobe@velcro.com

Velcro Italia, S.R.L

Tel: (+39) 039 62 70 01

Tel: (+44) 1606 738 806

Tel: (+48) 71 798 57 89

infovltd@velcro.com

infoveit@velcro.com

Velcro Australia Pty. Ltd. Tel: (+61) 3 9703 2466 infovaus@velcro.com Velcro.com.au

China

Velcro China Fastening Systems Company Limited Tel: (+86) 21 6045 2090 (Shanghai Sales Office) infovch@velcro.com Velcro.com.cn

Hong Kong

Velcro Hong Kong Ltd. Tel: (+852) 2570 3698 infovhk@velcro.com Velcro com hk Velcro.kr

Vietnam

Velcro Vietnam Company Limited Tel: (+84) 274 2222 497 infovn@velcro.com Velcro.vn